

Total No. of Questions : 8]

SEAT No. :

P2386

[4758]-545

[Total No. of Pages : 3

T.E. (E & TC)

ANTENNA & WAVE PROPAGATION

(2012 Course) (Semester - II) (End - Sem.)

Time : 3 Hours]

[Max. Marks :70

Instructions to the candidates:


- 1) *Answer any one Questions out of Q.No.1 or 2, Q.No.3 or 4, Q.No.5 or 6, Q.No.7 or 8.*
- 2) *Neat diagrams must be drawn wherever necessary.*
- 3) *Figures to the right side indicate full marks.*
- 4) *Assume suitable data if necessary.*

- Q1)** a) What is polarization of wave? Explain the polarization of three types of wave with the help of relevant diagram? **[8]**
- b) Write a short note on **[6]**
- i) Ionospheric abnormalities
 - ii) Multiwave propagation
- c) A lossless resonant $\lambda/2$ dipole antenna with input impedance of 73Ω is to be connected to a transmission line whose characteristics impedance is 50Ω . Assuming that the pattern the antenna is given approximately by $U = B \sin^3\theta$. Find the overall maximum gain of this antenna. **[6]**

OR

- Q2)** a) What is Poynting vector? What is its significance? Derive an expression for Poynting vector? **[6]**
- b) Explain antenna radiation mechanism in detail. **[6]**
- c) Calculate the mean excess delay, rms delay spread, and the maximum excess delay (10dB) for the multipath profile given in the figure below. Estimate the 50% coherence bandwidth of the channel. **[8]**

P.T.O.

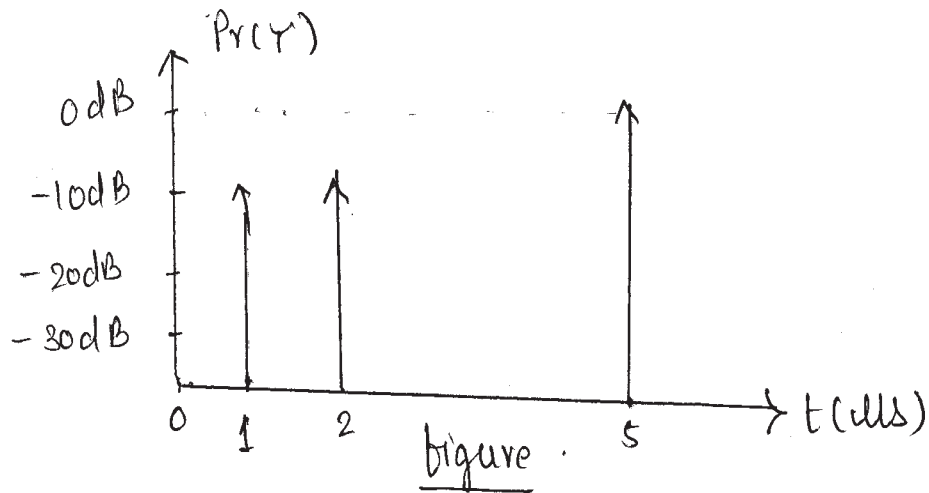

- Q3)** a) Derive the expression for radiation resistance of Infinitesimal Dipole. [9]
 b) Derive the expression for radiation resistance of small dipole antenna. [9]

OR

- Q4)** a) Calculate the radiation resistance of a double turn and an eight turn small circular loop when radius of loop is $\lambda/10$ and the medium is free space. Calculate its efficiency if loss resistance is 25Ω . [8]
 b) Derive mathematical expression for power density and radiation intensity of half wave dipole antenna and draw radiation pattern of half wave dipole antenna in E and H plane. [10]

- Q5)** a) Write a short notes on [8]
 i) Pattern Multiplication.
 ii) Binomial Array.
 b) Design a broad side Dolph-Tschebysheff array of five elements with half wavelength spacing between elements and with major to minor lobe ratio to be 19dB. Find the excitation coefficients & array factor. [8]

OR

- Q6)** a) Explain planar array. State its advantages and applications. [6]
- b) An Endfire array with element spaced at $\lambda/2$ and with axes of elements at right angles to the line of array is required to have directivity of 36. Determine -the array length and the width of major lobe. [5]
- c) Give the comparison of broadside and End fire antenna array. [5]
- Q7)** a) Give structure details, radiation pattern, specification and application of Super-turnstile Antenna. [5]
- b) What is meant by Rhombic Antenna? Explain its construction and operating principle. [5]
- c) Write a short notes on following antennas with respect to structural details, radiation pattern features and applications. [6]
- i) Hertz antenna
- ii) Lens Antenna

OR

- Q8)** a) Write short notes on the following antennas. [12]
- i) Whip antenna
- ii) Slot Antenna
- iii) Microstrip patch antenna
- b) A paraboloidal reflector antenna with diameter 20m is designed to operate at frequency of 6 GHz and illumination efficiency of 0.54. calculate the antenna gain in decibels. [4]

EEE