UNIVERSITY OF PUNE [4361]-111

F. E.(Common)Examination - 2013 ENGINEERING MECHANICS (2012 Pattern)

[Total No. of Questions:6]

[Total No. of Printed Pages :6]


[Time: 2 Hours] [Max. Marks: 50]

- (1) Answer Q1 or Q2, Q3 or Q4, Q5 or Q6.
- (2) Answers to the **two sections** should be written in **separate answer-books**.
- (3)Black figures to the right indicate full marks.
- (4)Neat diagrams must be drawn wherever necessary.
- (5) Use of, electronics pocket calculator is allowed.
- (6) Assume suitable data, if necessary.
- (7) *Use of cell phone is prohibited in the examination hall.*
- Q1 a) The resultant of two forces P and Q is 1200 N vertical.


[4]

Determine the force Q and the corresponding angle θ for the system of forces as shown in **Fig. 1a**.

b) The 4.5 x10⁶ kg tanker is pulled with constant acceleration of 0.001 [4] m/s² using cable that makes an angle of 15° with the horizontal as shown in **Fig. 1 b**. Determine the force in the cable using Newton's second law of motion.

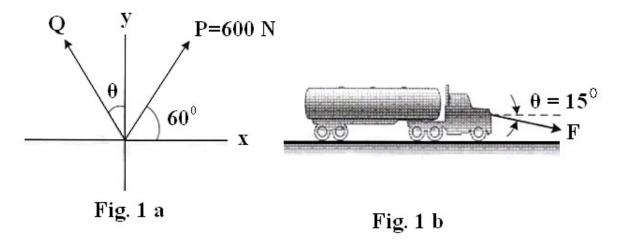

- c) During a race the dirt bike was observed to leap up off the small hill at [4] A at an angle of 60° with the horizontal as shown in **Fig. 1c**. If the point of landing is 6 m away, determine the approximate speed at which the bike was travelling just before it left the ground.
- d) A woman having a mass of 70 kg stands in an elevator which has a [4] downward acceleration of 4 m/s² starting from rest. Determine the work done by her weight and the normal force which the floor exerts on her when the elevator descends 6 m.

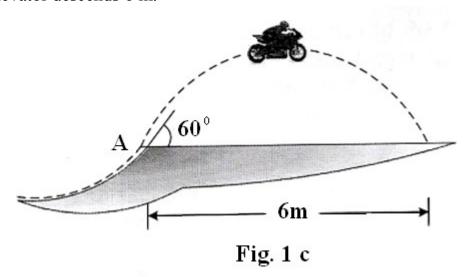


OR


- Q2 a) Determine the y coordinate of centroid of the shaded area as shown in **Fig. 2a**. [4]
 - b) A girl having mass of 25kg sits at the edge of the merry go-round so [4] her centre of mass G is at a distance of 1.5 m from the centre of rotation

as shown in **Fig. 2b**. Neglecting tangential component of acceleration, determine the maximum speed which she can have before she begins to slip off the merry go-round. The coefficient of static friction is $\mu_s = 0.3$. Use Newton's second law of motion.


- c) A baseball is thrown downward from a 15 m tower with an initial speed of 5 m/s. determine the speed at which it hits the ground and the time of travel.
- d) A ball has a mass of 30 kg and is thrown upward with a speed of 15 [4]
 m/s. Determine the time to attain maximum height using impulse momentum principle. Also find the maximum height.

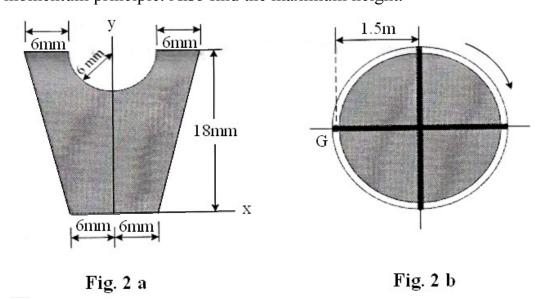

- Q3 a) The motor at B winds up the cord attached to the 65 N crate with a constant speed as shown in Fig. 3a. Determine the force in cord CD supporting the pulley and the angle θ for equilibrium. Neglect the size of pulley at C.
 - b) The boom supports the two vertical loads $P_1 = 800 \text{ N}$ and $P_2 = 350$ [6] N as shown in **Fig. 3b**. determine the tension in cable BC and component of reaction at A.

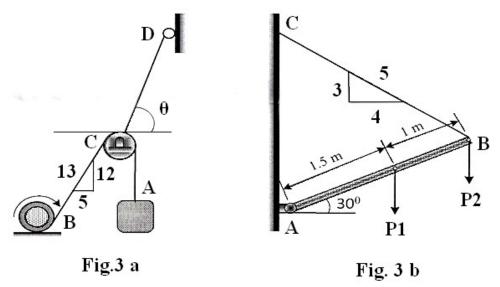

c) A concrete foundation mat in the shape of regular hexagon with 3 [5] m side support column loads as shown in **Fig. 3c**. Determine the magnitude of the additional loads P_1 and P_2 that must be applied at B and F if resultant of all six loads is to pass through the centre of the mat.

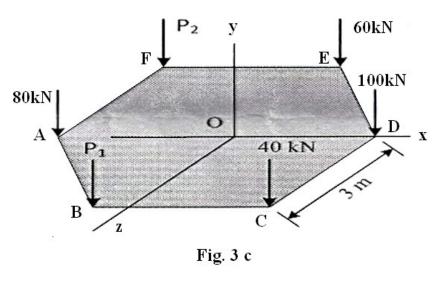


OR

Q4 a) The rope BC will fail when the tension becomes 50 kN as shown [6] In **Fig. 4a**. Determine the greatest load P that can be applied to the beam At B and reaction at A for equilibrium.

- b) The three cables are used to support the 800 N lamp as shown in **Fig.** [6] **4b**. Determine the force developed in each cable for equilibrium.
- c) State and explain active forces, reactive forces and free body diagram [5]


with suitable example.

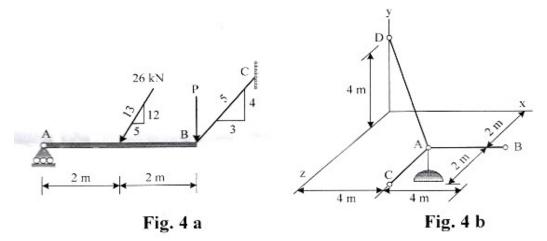

- Q5 a) Determine the magnitude and nature of forces in the members BC, HC [6] And HG of the truss loaded and supported as shown in Fig. 5a.
 - b) The 15 m ladder has a uniform weight of 80 N and rest against the smooth wall at B as shown in **Fig. 5b**. If the coefficient of static friction

 $\mu_s = 0.4$, determine if the ladder will slip?

c) Define angle of repose, angle of friction, coefficient of friction and cone of friction with sketches. [5]

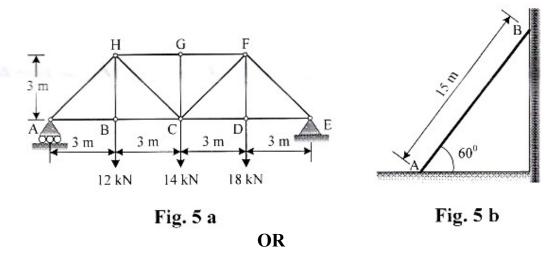

- Q6 a) Determine the forces in each member of the truss and state if the members are in tension or compression. Refer **Fig. 6a**.
 - b) Two loads are suspended as shown in **Fig. 6 b** from cable ABCD. [6] knowing that $d_c = 0.75$ m and $d_b = 1.125$ m, determine the component of reaction at A maximum tension in the cable.

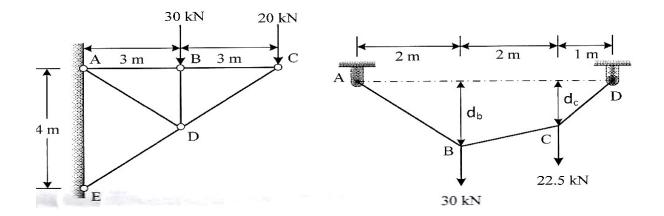


Fig. 6 a

Fig. 6 b

c) A 400 N block is resting on a rough horizontal surface as shown in **Fig. 6c** for which the coefficient of friction is 0.4. Determine the force P required to cause motion if applied to the block horizontally. What minimum force is required to start motion?

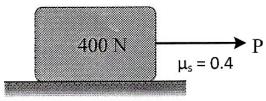


Fig. 6 C