


Time : 2½ Hours]

[Max. Marks : 70

Instructions to the candidates:

- 1) Answer all questions.
- 2) Neat diagrams must be drawn wherever necessary.
- 3) Figures to the right side indicate full marks.
- 4) Use of Calculator is allowed.
- 5) Assume suitable data if necessary.


Q1) a) Derive transfer function using block diagram reduction. [6]

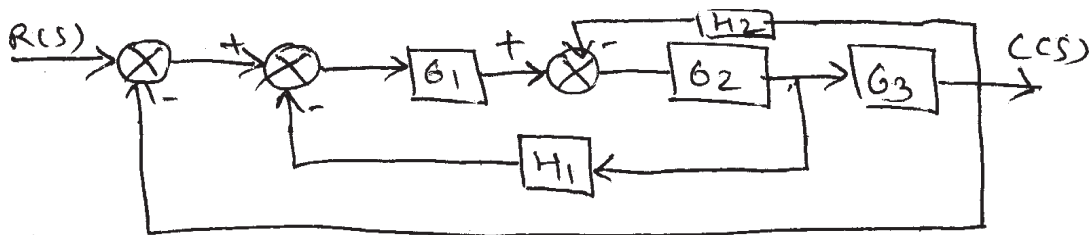

- b) Derive transfer function of DC servomotor(armature control). [7]
- c) Derive time response of unit step input to first order system. Sketch the response. [7]

OR

Q2) a) Explain F-V analogy and F-I analogy. [6]
 b) Determine transfer function of following electrical network [7]

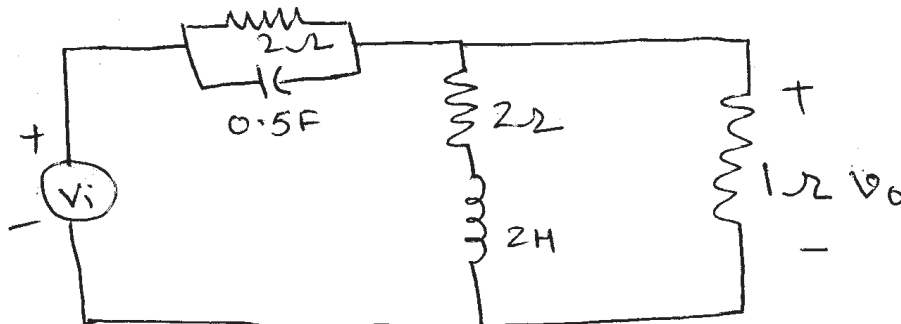

- c) What is type and order of system. Explain effect of type of system on steady state error. [7]

P.T.O.

- Q3)** a) Define stability and give necessary condition for stability. [4]
 b) Explain For unity feedback system with open loop transfer function given as $G(s) = \frac{K}{s(s+1)(s^2+4s+13)}$. Draw root locus when K is varied from 0 to ∞ . Also find range of values of K for which system is stable. [12]

OR

- Q4)** a) Using Routh Hurwitz criterion for the unity feedback control system with open loop transfer function $G(s) = \frac{K(s+13)}{s(s+3)(s+7)}$ [8]
 i) Find range of values of K for the system to be stable
 ii) Find the value of K for marginally stable system and corresponding close loop poles and frequency of sustained oscillations.
 b) Explain any four rules for root locus. [8]

- Q5)** a) Draw bode plot for following system $G(s) = \frac{20(s+2)}{s(s+10)}$ Find gain margin and phase margin comment on stability. [12]
 b) Explain different frequency domain specifications. [6]

OR

- Q6)** a) Explain how gain margin and phase margin are determined in bode plot and stability from that. [6]
 b) Explain nyquist stability criterion. Sketch nyquist plot for the system with open loop transfer function given by $GH(s) = \frac{20}{(s+2)(s+3)}$ comment on stability of system. [12]

- Q7)** a) Explain P, PI, PID controller and their features. [8]
 b) A unity feedback system has the plant transfer function $G(s) = \frac{C(s)}{M(s)} = \frac{10}{s(s+2)}$. A proportional plus derivative control is employed to control the dynamics of the system. Determine
 i) The damping factor and undamped natural frequency when $K_d = 0$
 ii) The value of K_d such that damping factor is 0.6 [8]

OR

Q8) a) Explain Ziegler Nichols method of tuning PID controller. [8]

b) Using Ziegler Nichols method design a PID controller for system with

open loop transfer function $H(s) = \frac{15}{s(s+1)(s+3)}$. Write close loop

transfer function of plant including PID controller. [8]

